


SMD Power Inductor


CDMC6D28



Dimension - [mm]

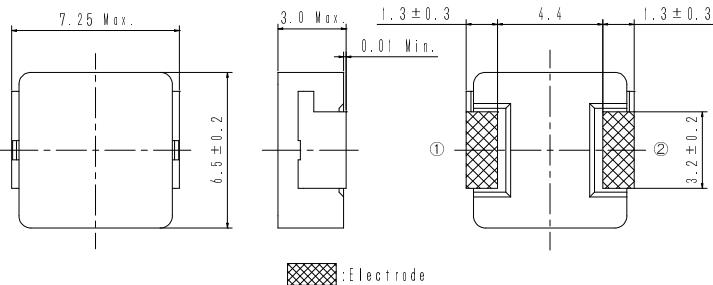

Land pattern and Schematics - [mm]

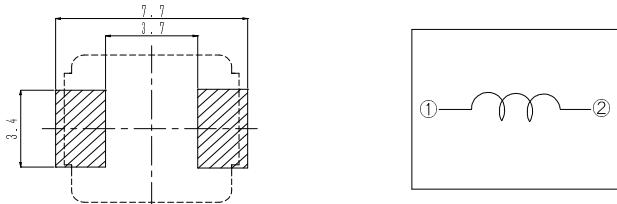

Electrical Characteristics

Part No.	Stamp	Inductance (μ H) [Within] ≈ 1	D.C.R. (m Ω) Max. (Typ.) (at 20°C)	Saturation Current (A) (at 20°C) ≈ 2	Temperature rise current (A) ≈ 3
CDMC6D28NP-R20MC	R20	$0.20 \pm 20\%$	2.5 (2.1)	21.7 (27.2)	17.4 (19.8)
CDMC6D28NP-R30MC	R30	$0.30 \pm 20\%$	3.2 (2.7)	15.4 (19.3)	16.1 (18.2)
CDMC6D28NP-R47MC	R47	$0.47 \pm 20\%$	4.2 (3.5)	13.6 (17.0)	14.0 (15.9)
CDMC6D28NP-R68MC	R68	$0.68 \pm 20\%$	5.4 (4.5)	11.3 (14.2)	12.1 (13.7)
CDMC6D28NP-1R0MC	1R0	$1.0 \pm 20\%$	8.8 (7.3)	8.8 (11.0)	9.5 (10.8)
CDMC6D28NP-1R5MC	1R5	$1.5 \pm 20\%$	12.5 (10.4)	7.3 (9.2)	7.6 (8.6)
CDMC6D28NP-2R2MC	2R2	$2.2 \pm 20\%$	19.3 (16.1)	6.0 (7.6)	6.0 (6.8)
CDMC6D28NP-3R3MC	3R3	$3.3 \pm 20\%$	30.6 (25.5)	5.0 (6.3)	4.9 (5.5)
CDMC6D28NP-4R7MC	4R7	$4.7 \pm 20\%$	46.4 (38.7)	4.3 (5.4)	3.7 (4.2)

※1. Measuring condition: at 1MHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 80% of its nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t=40^\circ\text{C}$ ($T_a=20^\circ\text{C}$).

SMD Power Inductor

CDMC6D28




Saturation Current & Temperature Rise Graph

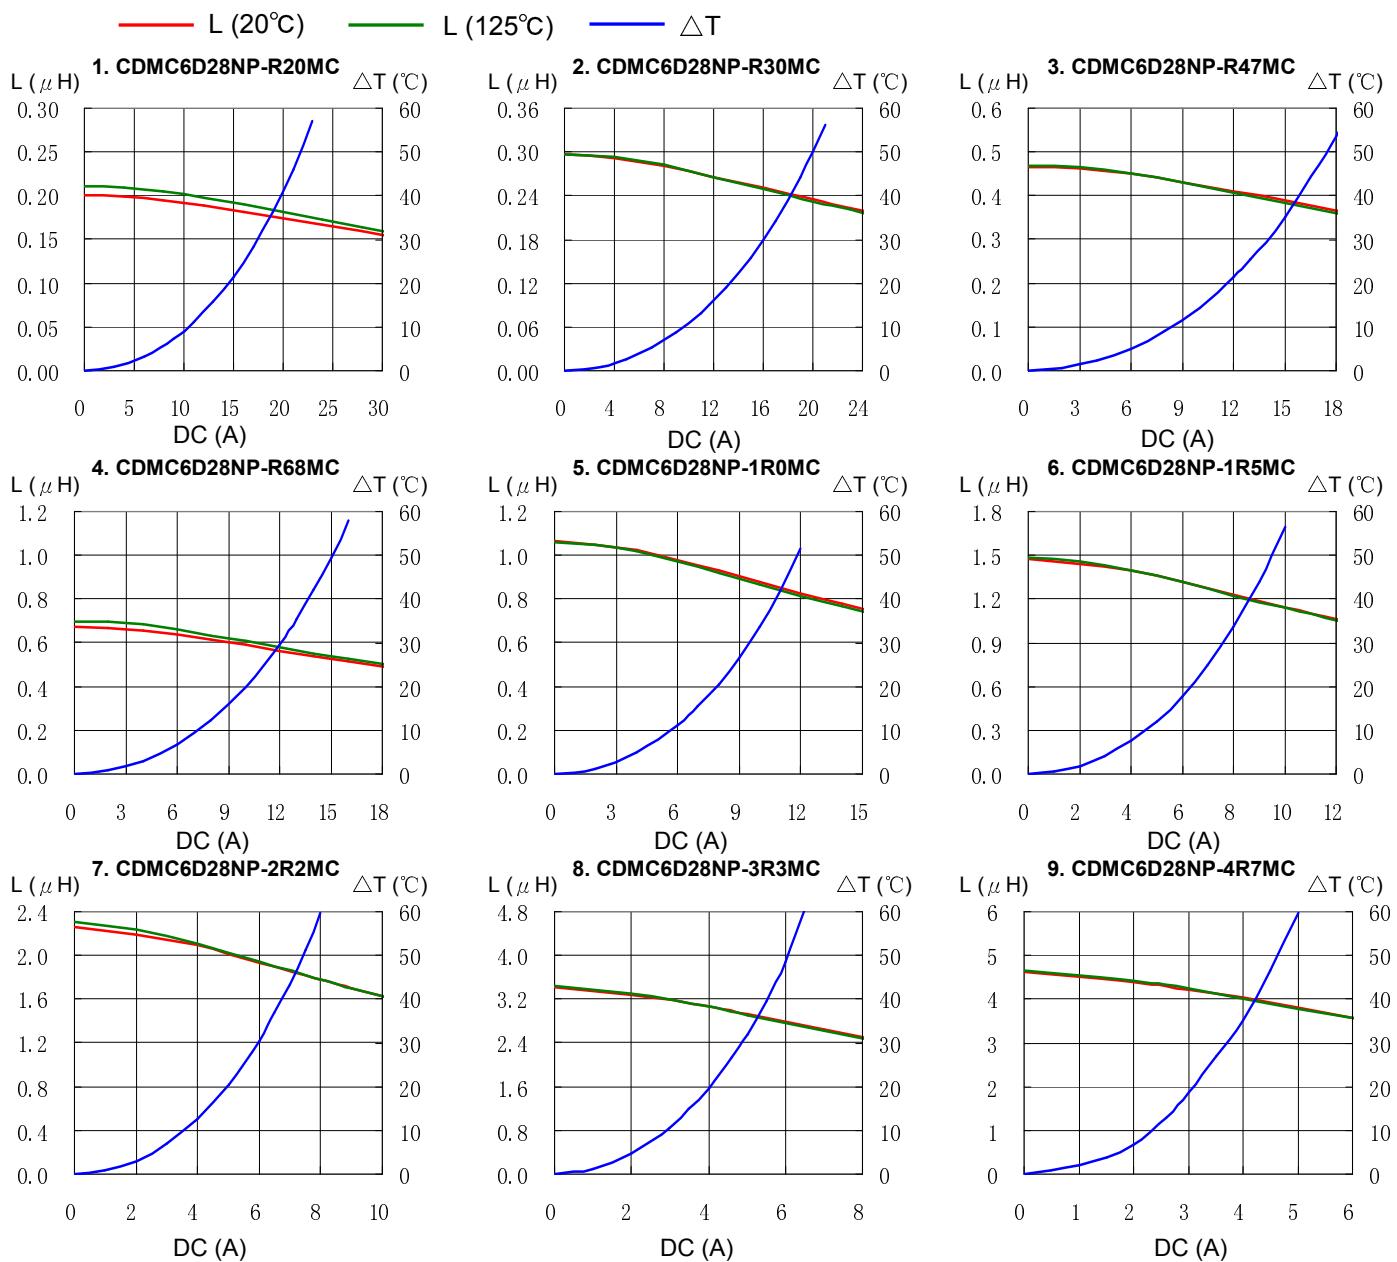

SMD Power Inductor

CDMC6D28

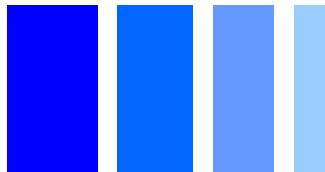

 **sumida**

Solder Reflow Condition

