

SMD Power Inductor


CDMC104




**Halogen
Free**



Dimension - [mm]

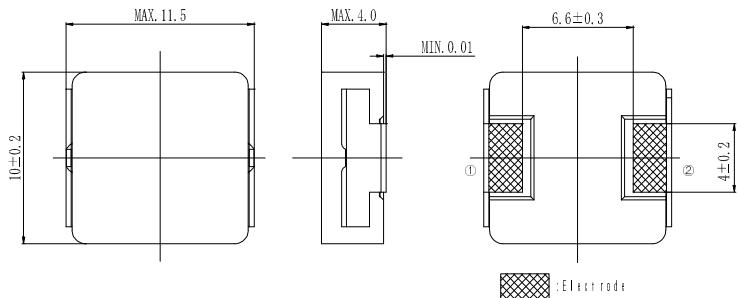

Land pattern and Schematics - [mm]

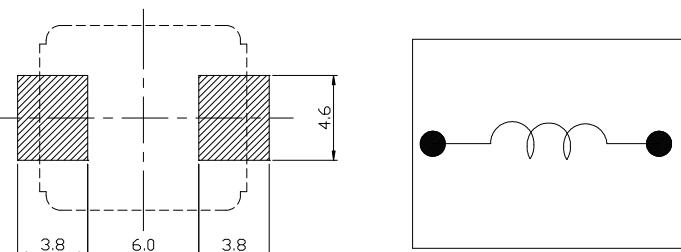

Description

- Metal compound molding type construction.
- Magnetically shielded.
- L × W × H: 11.5 × 10.2 × 4.0 mm Max.
- Product weight: 2.5 g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +85°C
- Solder reflow temperature: 260 °C peak.

Packaging

- Carrier tape and reel packaging.
- 13.0" diameter reel
- 500pcs per reel

Applications

- Ideally used in low voltage-high current laptop PC & sever power supply.

Electrical Characteristics

Part No.	Stamp	Inductance [Within] (μ H) ※1	D.C.R. [Within] (at 20°C) (mΩ)	D.C. Saturation current (A)※2		Temperature rise current (A)※3
				(at 20°C)	(at 125°C)	
CDMC104NP-R36M	R36M	0.36±20%	1.10±10%	28.0	27.0	25.0
CDMC104NP-R56M	R56M	0.56±20%	1.48±10%	22.0	21.0	21.0

※1. Measuring condition: at 1MHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 80% of its nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).

SMD Power Inductor

CDMC104



Saturation Current & Temperature Rise Graph

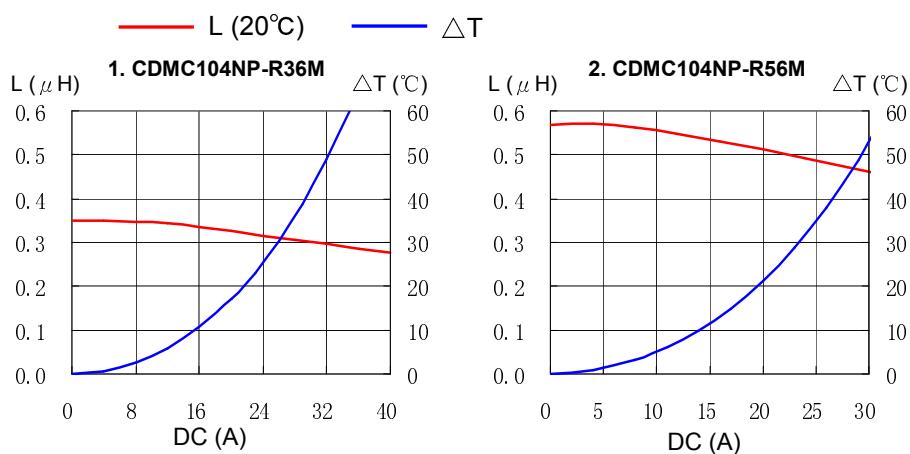

Solder Reflow Condition

